

Review of Analysis of Existing C-Section Mini Tractor Trolley Chassis

¹Pranav G. Firke ²Yugesh A. Kharche ³Nitin A. Kharche

¹P.G. Scholar V.B.K.C.O.E. Malkapur (SGBAU) India

²Associate Professor V.B.K.C.O.E. Malkapur (SGBAU) India

³Academic Dean V.B.K.C.O.E. Malkapur (SGBAU) India

ABSTRACT

A Chassis is one of the key components of tractor trolley. It consists of an internal framework that supports the container of tractor trolley in its construction and use. The power of the chassis is an important issue for the industry when the weight of the chassis is reduced. Various small scale industries are adopting for designing and manufacturing the machine components. One industry which is producing tractor trolleys for agricultural use is identified for this study. As the chassis design is not accurate and extra material is used to overcome the failure, as it result in the self-weight of the chassis gets increases. Just because of that, the self-load of trolley applied on the chassis, leaf spring and axle of the trolley mainly causes failure in dynamic condition. Failure such as breakage of axle hub assembly, breakage of leaf spring, axle bending occurs.

Keywords- Chassis, Cad model, FEA.

1. INTRODUCTION

It is one of the most important elements that give the strength and stability to the vehicle under several conditions. The Automobile frames provide strength and flexibility to the automobile. The main consideration in chassis design is that to have sufficient bending stiffness along with strength for better handling characteristics. The Chassis is mainly used to support the container on which the load is to be carried out.

1.1 Chassis

So, basically the Chassis word is a French term and was primarily used to denote the frame parts. It is the brain of the vehicle. A vehicle with an out body is called chassis. The basic components of the vehicle all parts are mounted on the Chassis frame. It is the head mounting for all the components including the body. So it is also known as Carrying Unit. Material properties for chassis are below.

Table:1 Material Properties of Structural Steel used for chassis.

Young's Modulus	200 x E9 pa
Poisson's Ratio	0.3
Density	7.85e-006 kg/mm ³
Tensile Yield Strength	250. Mpa

1.2 Characteristics of Automobile Chassis-

The chassis mainly gets reaction forces of the wheels during acceleration and braking and also absorbs aerodynamic wind forces and road shocks through the suspension. So the chassis should be analyzed and built to maximize payload capability and to provide versatility, durability as well as adequate performance.

All are the real physical structures, when subjected to loads or displacements, it normally behave dynamically. The additional inertia forces, according to Newton's second law, are equal to the mass times the acceleration. If the loads or displacements are applied very slowly, then the inertia forces can be neglected and a static load analysis can be justified, but in reality the loads are dynamic in nature. Hence, in this work, an effort is made to investigate the static and dynamic response of truck chassis due to road undulations.



Fig. 1 Chassis of Mini Tractor Trolley Chassis.

1.3 Functions of Chassis-

- To carry load of trolley with goods carried in the body.
- To withstand the forces caused due to the sudden starting or stopping.
- To withstand the stresses caused due to the uneven surface condition.
- To withstand centrifugal force while cornering
- To holds the load of the body, engine, gear box etc.
- To move load of the goods carried in the body

2. SPECIFICATION OF EXISTING MINI TRACTOR TROLLEY CHASSIS.

The total capacity of the trolley is just 50 KN but the self weight of trolley and the other accessories is 37KN. So here the gross weight come over is 87 KN is considered the existing chassis consists of ‘C’ section having cross section area 150mm x 75mm x 5.7mm and the material used for manufacturing is mild steel. The specifications of tractor trolley are shown in table 2 which is collected from industry itself.

Table: 2 Specification of Tractor Trolley.

General	Overall Length	Box 3900mm
		Chassis :- 1800mm
Overall	Width	1370 mm
Load	Payload Capacity	5000 kg
	Unloaded Weight including weight of chassis	2220 kg
	Gross Weight considering factor of safety 1.2	8664kg

3. STRUCTURAL ANALYSIS OF CHASSIS

In the study, market available tractor trolley Chassis is selected and also, its dimension is noted. The Possible loads acting and the place of loads are noted. According to the dimensions, tractor trolley Chassis is modeled using PRO E software. It is then imported to design modeler software ANSYS.

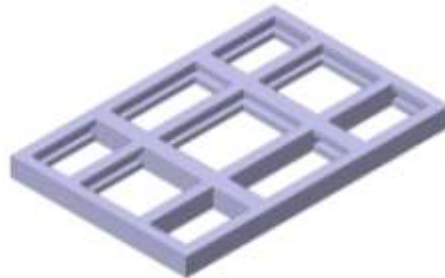


Fig.3.1 Cad Model of C section Mini Tractor Trolley Chassis

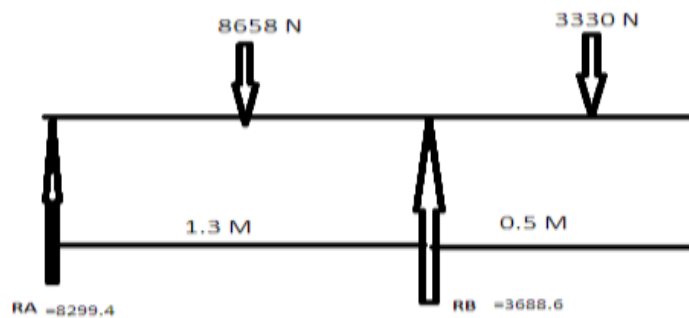


Fig.3.2 Load Diagram of Chassis

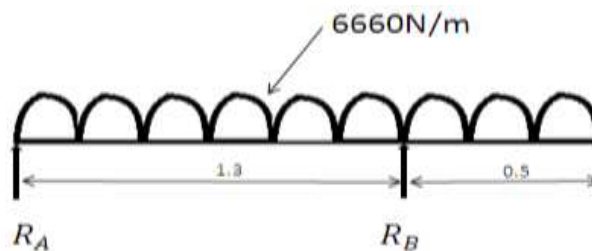


Fig.3.3 Reaction Diagram of Chassis

4. ANALYSIS OF EXISTING 'C' CROSS SECTION CHASSIS USING ANSYS TOOL

The existing chassis geometry is generated in ANSYS workbench 11 by selecting toolbox where various commands like draw, dimensioning, constraints, extrude, generate, rotate etc. are used. After that The mesh is displayed on the model and after that load points are defined and load values are given. Then the results are generated automatically for stresses and deformation in solution phase. Figure 5 shows the ANSYS results for Mesh Generated, Deflection, Equivalent (von mises) Stress, Shear Stress, Normal Stress, Load.

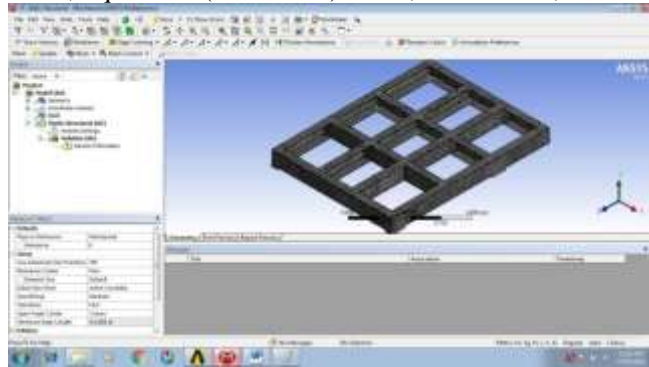


Fig.4.1 Meshing of Chassis

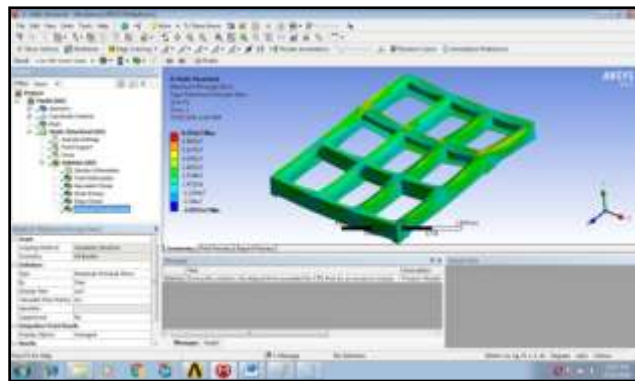


Fig.4.2 Maximum Principal Stress

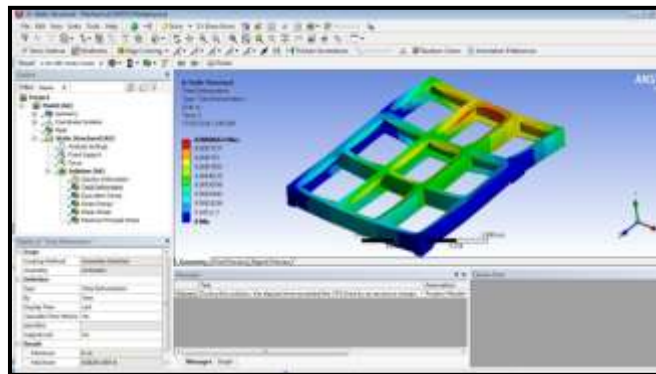


Fig.4.3 Total Deflection of Chassis

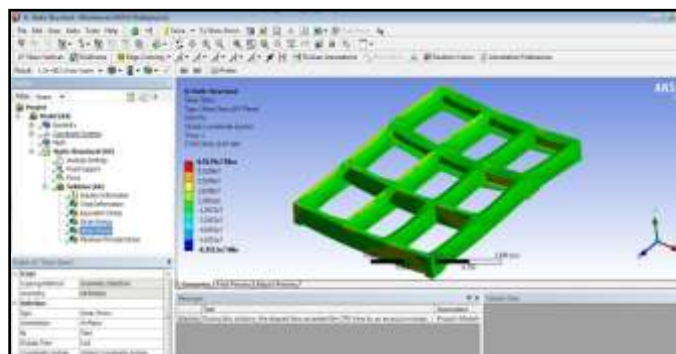


Fig.4.4 Shear Stress produced in Chassis

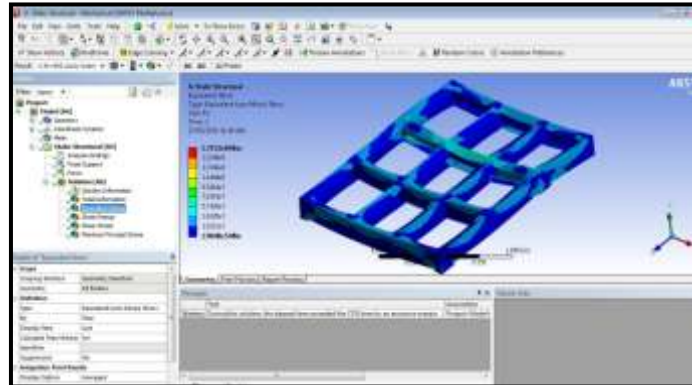


Fig.4.5 Normal Stress

Table: 3 Stresses, Deflections and Stiffness to Weight Ratio.

Sr. No	Values
Bending Stress	85.49 N/ mm ²
Deflection	1.38 MM
Stiffness to weight ratio per mm	28.53

5. CONCLUSION

The study shows that with the use of the finite element analysis we find that the Mini Tractor Trolley chassis is over weighted due to use of excessive material. The material used for manufacturing of chassis is C channel but in study we find that the thickness of existing c channel is large. It carries also the stresses but due to excess weight the cost of production as well as material cost increases. The Principal Stress, Shear stress, Normal Stress and Deflection shows that, it is necessary to redesign the Chassis for better results and reduction in use of material.

6. REFERENCES

- [1] CicekKaraoglu, N. SefaKuralay “Stress analysis of a truck chassis with riveted joints” Elsevier Science B.V Finite Elements in Analysis and Design 38 (2002) 1115–1130.
- [2] J. Gadus, “Optimization of frameworks by means of FEM use” Slovak Agricultural University, Nitra, Slovak Republic.
- [3] MohdAzizi Muhammad Nora,,HelmiRashida, Wan MohdFaizul Wan Mahyuddin “Stress Analysis of a Low Loader Chassis” Elsevier Ltd. Sci Verse Science Direct Procedia Engineering 41 (2012) 995 – 1001.
- [4] MohdNasirTamin, Journal Mekanikal, No.26, 76 – 85.[2] Statics and Dynamics Structural Analysis Of A 4.5 Ton Truck Chassis, Teo Han Fui, RoslanAbd. Rahman*,Journal Mekanikal, December 2007, No. 24, 56 – 67
- [5] N.K.Ingole, D.V. Bhope “Stress analysis of tractor trailer chassis for self weight reduction” International Journal of Engineering Science and Technology (IJEST), ISSN: 0975-5462 Vol. 3 No. 9 September 2011.
- [6] Patel Vijay kumar V, Prof. R. I. Patel “Structural Analysis of Automotive Chassis Frame and Design Modification for Weight Reduction” International Journal of Engineering Research & Technology (IJERT), ISSN: 2278-0181, Vol. 1 Issue 3, May – 2012.
- [7] RoslanAbdRahman, MohdNasirTamin, OjoKurdi “Stress analysis of heavy duty truck chassis as a preliminary data for its fatigue life prediction using FEM” JurnalMekanikal December 2008, No. 26, 76 – 85.
- [8] S.S.Sane, GhanashyamJadhav, Anandaraj “Stress analysis of light commercial vehicle chassis by FEM” piaggio vehicles pvt ltd pune.
- [9] Tirupathi V. Chandrupatle, Ashok D.Belegundu “Introduction to Finite Elements in Engineering”, 6 th edition, 2008, Pearson education, New Delhi. RoslanAbdRahman,