

Ultrasonic Studies of Molecular interactions Binary Mixtures of Tamarind Leaves.

Dr. Ritesh R.Naik¹, Sandeep Khachane²

¹ Assistant Professor, Deptment of Chemistry, D.D.Bhoyar College of Arts & Science Mouda, Nagpur, Maharashtra, India

² Assistant Professor, Department of Applied Science, Padm. Dr. V. B. Kolte College of Engineering, Malkapur, Maharashtra, India

ABSTRACT

In the present study, ultrasonic velocity (U), density (ρ), and viscosity (η) have been measured at frequency 1 MHz in the binary mixtures of Tamarind with water in the concentration range (0.1 to 0.0125%) at 303 K, 308 K, and 313 K using a multifrequency ultrasonic interferometer. The measured value of density, ultrasonic velocity, and viscosity have been used to estimate the acoustical parameters, namely adiabatic compressibility (β_a), relaxation time (τ), acoustic impedance (z), free length (L_f), free volume (V_f), and internal pressure (Π_i), Wada's constant (W). The obtained results support the complex formation, molecular association by intermolecular hydrogen bonding in the binary liquid mixtures

Keywords: Tamarind, free volume, acoustical parameters, ultrasonic velocity, adiabatic compressibility, acoustic impedance.

1. INTRODUCTION

Ultrasonic waves are used in many applications including plastic welding, medicine, Ultrasonic waves give us the ability to 'see through' solid / opaque material and detect surface or internal flaws without affecting the material in an adverse manner. It had been identified, about 200 years ago, that dogs could hear [1]. This canine ability is often used in police departmental work and by dog trainers. These sound waves are used by bats as a kind of navigational radar for night flying [2]. In the field of technology, the waves are being used to measure depth of sea, directional signaling in submarine, and mechanical cleaning of surface soldering [3], and to detect shoals of fish. Acoustic sonograms have become an important medicinal diagnostic tool which is widely used nowadays [4-5]. Ultrasonic waves are used for both diagnosis and therapy. It includes the detection of wide variety of anomalies, such as tumor, bloodless surgery, proper extraction of broken teeth, cardiology, and stone fragmentation [6]. Ultrasound is more sensitive than X-rays in distinguishing various kinds of tissues. It is believed to be less hazardous than X-rays, although possible hazards of ultrasound have not yet been thoroughly explored [7]. Most of the information extracted from ultrasonic study of fluids is confined to the determination of hydration number and compressibility [8-9]. The successful application of acoustic methods to physicochemical investigations of solution becomes possible after the development of adequate theoretical approaches and methods for precise ultrasound velocity measurements in small volumes of liquids [10-12]. In the present paper, acoustical studies have been studied in water at different temperatures over a wide range of Tamarind concentrations. From the experimental values a number of thermodynamic parameters namely ultrasonic velocity, adiabatic compressibility, acoustic impedance,

relaxation time, free length, free volume, internal pressure, Rao's constant, ultrasonic attenuation, cohesive energy, and molar volume, Wada's constant has been calculated. The variation of these parameters with concentration was found to be useful in understanding the nature of interactions between the components [13-16]. Tamarind Has Played an important Role in traditional medicine. It was used to treat diarrhea, Constipation.

2. RESULT & DISCUSSION

The measured values of ultrasonic velocity, density and related Acoustical parameters like adiabatic compressibility (β_{ad}), intermolecular free length (L_f), relaxation time (τ), free volume (V_f), internal pressure (Π_i), acoustic impedance (Z), Wada's constant (W), ultrasonic attenuation (α/f^2), Rao's constant (R), molar volume (V_m), cohesive energy (CE) of with water at 303 K, 308 K, 313 K in different concentrations are shown in figure 1 to 14. Ultrasonic velocity and density of the binary mixtures along with thermodynamic values such as adiabatic compressibility, free length, and impedance at different temperature were determined. It is observed that ultrasonic velocity increases with increase in concentration which may be due to solute-solvent interaction. The adiabatic compressibility decreasing with an increase in concentration shows that there is strong solute-solvent interaction. Acoustic impedance shows nonlinear increasing variation with an increase in molar concentration. This indicates the complex formation and intermolecular weak association which may be due to hydrogen bonding. Thus complex formation can occur at these molar concentrations between the component molecules. The opposite trend of ultrasonic velocity and adiabatic compressibility indicates the association among interacting Tamarind and water molecules. In the present system of Tamarind, free length varies nonlinearly with increase in molar concentration which suggests the significant interaction between solute and solvent due to which structural arrangement is also affected. Relaxation time decreases with an increase in concentration. Nonlinear trend of density with concentration indicates the structure-making and breaking property of solvent due to the formation and weakening of H-bonds. The free volume decreases and internal pressure increases with an increase in molar concentration, indicating that there is a weak interaction between solute and solvent molecules. Rao's constant and Wada's constant decrease with increasing concentration, which indicates that there is a weak interaction between solute and solvent molecules.

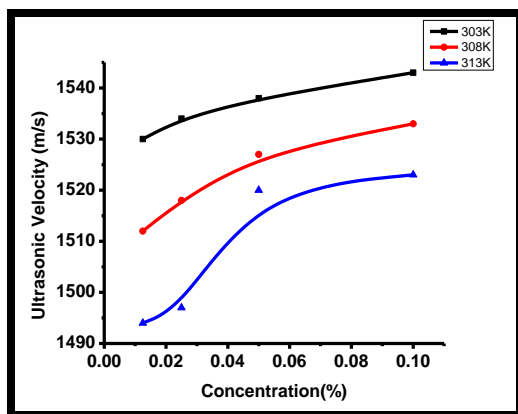


Fig.1:-Variation of Ultrasonic velocity with concentration and temperature

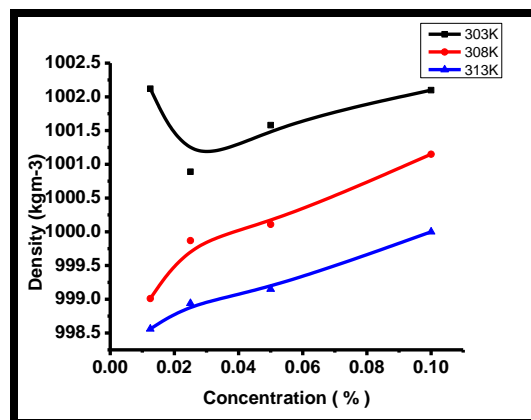


Fig.2:-Variation of Density with concentration and temperature.

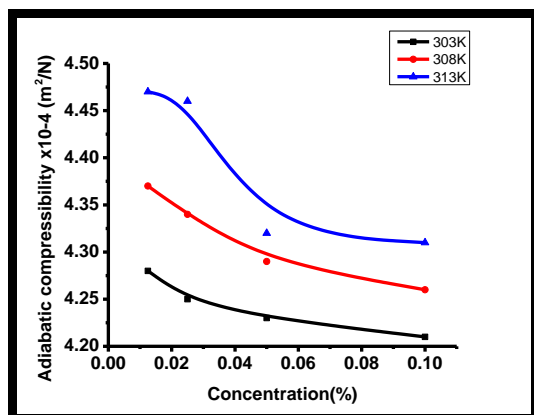


Fig.3:-Variation of Adiabatic compressibility with concentration and temperature

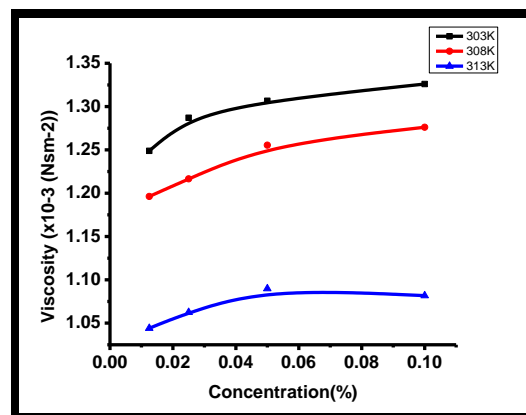


Fig.4:-Variation of Viscosity with concentration and temperature

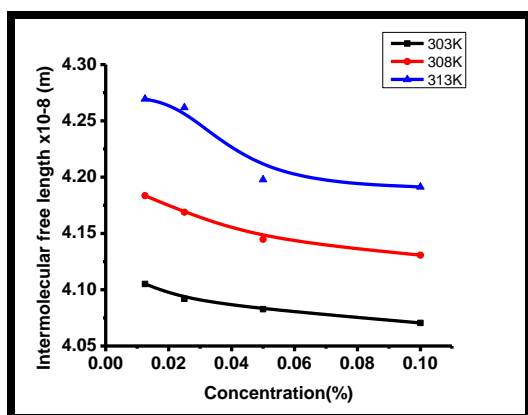


Fig.5:-Variation of Intermolecular free length with concentration and temperature

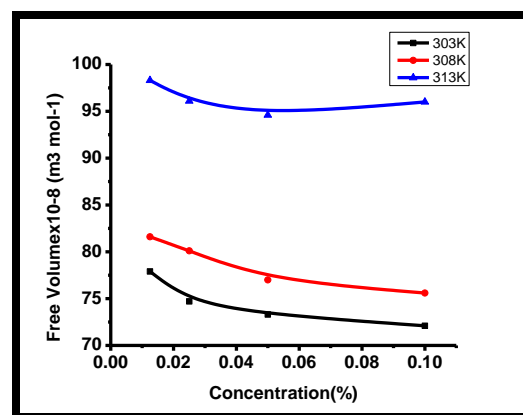


Fig.6:-Variation of free volume with concentration and temperature

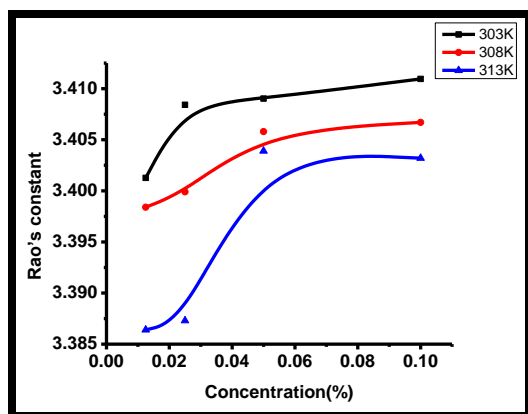


Fig.7:-Variation of Rao's constant with concentration and temperature

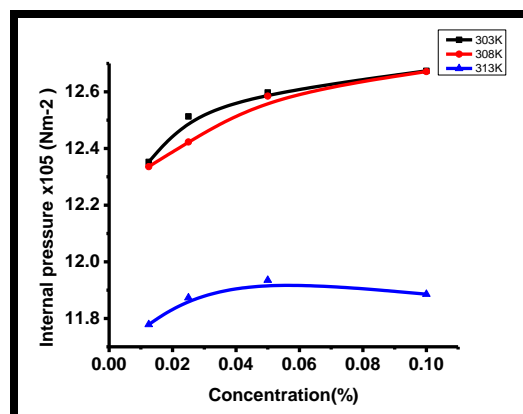


Fig.8:-Variation of Internal Pressure with concentration and temperature

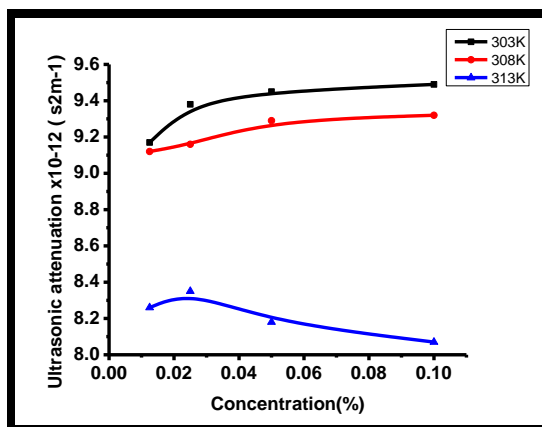


Fig.9:-Variation of Ultrasonic attenuation with concentration and temperature

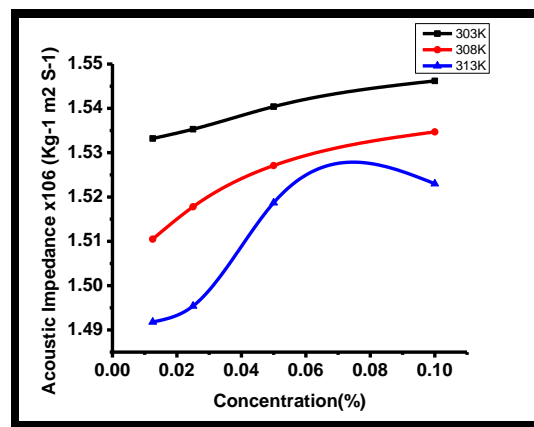


Fig.10:-Variation of Acoustic Impedance with concentration and temperature

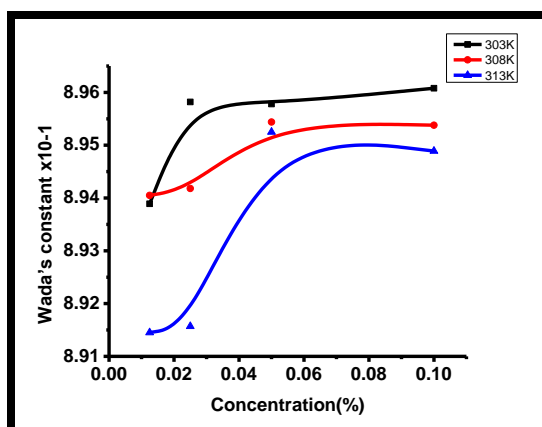


Fig.11:-Variation of Wada's constant with concentration and temperature

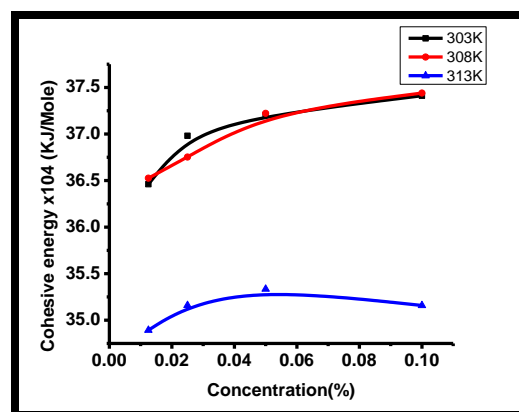


Fig.12:-Variation of Cohesive energy with concentration and temperature

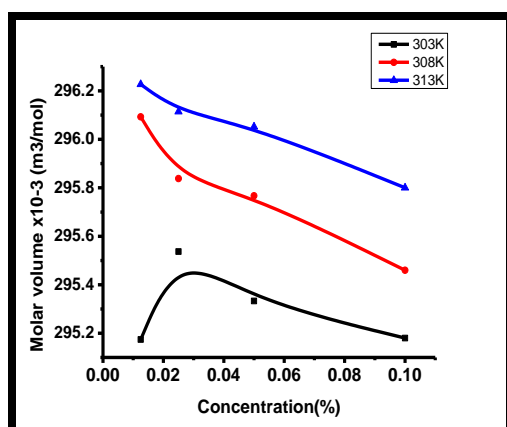


Fig.13:-Variation of Molar volume with concentration and temperature

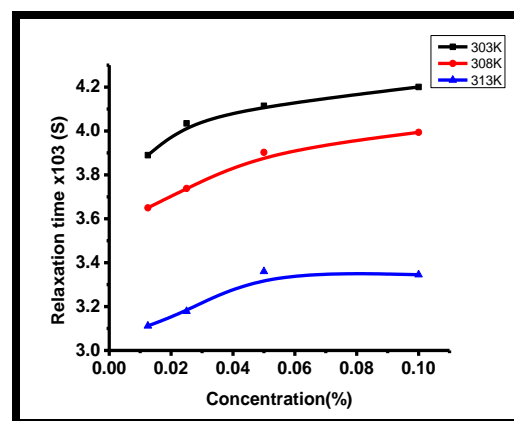


Fig.14:-Variation of Relaxation time with concentration and temperature

3. Material and Methods

Tamarind used in the present work was of analytical reagent (AR) grade with a minimum assay of 99.9%, Solution of different concentration of Tamarind powder were prepared by water as solvent. The ultrasonic velocity (U) has been measured in ultrasonic interferometer Mittal Model-F-05 with an accuracy of 0.1%. The viscosities (η) of binary mixtures were determined using Ostwald's viscometer by calibrating with doubly distilled water with an accuracy of ± 0.001 Pa Sec. The density (ρ) of these binary solutions was measured accurately using 25 mL specific gravity bottle in an electronic balance, precisely and accurately. The basic parameter U, η , and ρ were measured at various concentrations (0.0125 % to 0.1%) and temperatures (303, 308 & 313 K). The various acoustical parameters were calculated from U, η , and ρ values using standard formulas. On using ultrasonic velocity, density and viscosity the following acoustical parameters like adiabatic compressibility(κ) [17] , intermolecular free length[18] (Lf) , relaxation time [19] (τ), free volume [20] (Vf) , internal pressure [21] (Π_i) , acoustic impedance [22] (Z), Wada's constant [23] (W), ultrasonic attenuation [24] (α/f^2), Rao's constant [25] (R), molar volume (Vm), and cohesive energy (CE) were calculated by applying the following expressions.

1. Ultrasonic velocity (v): The relation used to determine the ultrasonic velocity is given by,

$$v = f \times \lambda \text{ ms}^{-1}$$

Where, f - Frequency of ultrasonic waves, λ - Wavelength

2. Adiabatic compressibility (κ): Adiabatic compressibility is defined as,

$$\kappa = (1/v^2 \rho) \text{ kg}^{-1} \text{ ms}^2$$

Where, v – Ultrasonic velocity, ρ – Density of the solution.

3. Free volume (V_f): Free volume in terms of the ultrasonic velocity (v) and the viscosity of the liquid (η) are calculated by formula

$$V_f = (M v / k \eta)^{3/2} \text{ m}^3$$

Where, M is the molecular weight and 'k' is a temperature-independent constant equal to 4.28×10^9 for all liquids.

4. Acoustic impedance (Z): The acoustic impedance is computed by the formula

$$Z = v \times \rho \text{ kg m}^{-2} \text{ s}^{-1}$$

5. Free length (Lf): It is calculated on using formula,

$$L_f = (K \sqrt{\kappa})$$

K - Jacobson temperature dependent constant defined as $K = (93.875 + 0.345T) \times 10^{-8}$, κ = Adiabatic compressibility.

6. Ultrasonic Attenuation (α/f^2): It is calculated by, $\alpha/f^2 = 8\pi^2\eta/3\rho v^3$

7. Viscous relaxation time (τ): It is calculated by using the relation,

$$\Gamma = 4\eta/3\rho v^2$$

8. Rao's Constant (R): Rao's constant is calculated by using formula,

$$R = V \cdot v_3^1 \text{ or } R = \left(\frac{M}{\rho}\right) v_3^1$$

M= Molecular Weight.

9. Wada's constant (W): It was calculated by formula,

$$W = M \cdot \kappa^{-1/7} / \rho$$

10. Internal pressure (Π_i): On using below-cited formula, Internal pressure is calculated,

$$\Pi_i = bRT \left[\frac{\kappa\eta}{v} \right]^2 \frac{\rho_3^2}{M_6^2}$$

11. Molar volume: It is the ratio of density & molecular weight.

$$V_m = \frac{\rho}{M}$$

12. Cohesive energy (CE) : Cohesive energy is calculated by formula quoted below,

$$CE = \Pi_i V_m$$

4. Conclusion

In the present paper the ultrasonic velocity(U), density, viscosity and acoustical parameters, viz. adiabatic compressibility, intermolecular free length, relaxation time, acoustic impedance, attenuation, Rao's constant, molar volume, cohesive energy, Wada's constant have been measured at different concentrations. The parameters indicate that there is a strong molecular interaction between unlike molecules as the concentration of drug solution increases. The molecular interaction decreases with an increase in temperature.

In the present paper the ultrasonic velocity(U), density, viscosity and acoustical parameters, viz. adiabatic compressibility, intermolecular free length, relaxation time, acoustic impedance, attenuation, Rao's constant, molar volume, cohesive energy increases. The molecular interaction decreases with an increase in temperature. Wada's constant have been measured at different concentrations. The parameters indicate that there is a strong molecular interaction between unlike molecules as the concentration of drug solution.

5. Acknowledgments

The authors are thankful to Department of Chemistry, Jankidevi Bajaj College of Science, Wardha, for their kind support in the present research work Optional.

6. References and Notes

- [1] Gamow, G. ; Cleve, J. M., “Physics foundation and Frontier” 3rd Ed., *Prentice Hall of India*, Delhi, **1978**,155.
- [2] Duncan, T. ; Adanved Physics , 2nd Ed., *J. Murry. London*, **1981**, 215.
- [3] Ameta, S. C. ; Punjabi, P. B. ; Swarnkar, H. ; Chhabra, N. and Jain, M. , *J. Indian Chem. Soc.*, **2001** 78, , 627 .
- [4] Frizzell, L. A. ; Encyl, Appl. Phys. Edr. G.L. Trigg, *VCH Publ.*, New York, **1998**, 22, 475
- [5] Wells, P. N. T.; “Biomedical Ultrasonics”, *Acad. London* , **1977**.
- [6] Shrivastava, S. K. and Kailash, *Bull. Mater. Sci.* , **2004**, 27(4), 383 .
- [7] Scars, F. W. ; Zemansky, M. W. and Young, F. D. , “College Physics”, 4th Ed., *Addison-Wesley Publishing Co.*,**1974**, London, 366.
- [8] Shilo, H. ; *J. Am. Chem. Soc.* ,**1958**, 80 , 70 .
- [9] Bukin, V. A. ; Sarvazyan, A. P. and Passechnic, V. I. , *Biofizika*, **1979**, 24, 61.
- [10] Sahai, R. ; Pande, P. C. and Singh, V. , *Ind. J. Chem.* , **1979**, 18A, 217-220 .
- [11] Baluja, S. and Oza, S. , *Fluid Phase Equilib.*,**2001**, 178.
- [12] Aswar, A. S., *Ind. J. Chem.***1997**, 36A, 495-498.
- [13] Ali, A. and Naine, A.K. , *J.Pure Appl.Ultrason.*,**1999**, 21, , 31-34.
- [14].Aswale S. S. ; Aswale, S. R.; Dhote, A. B. ; Tayade, D. T., *J chem. Pharma Research* , **2011**, 3(6) , 233- 237.
- [15] Dabarse, P. B. ; Patil, R. A. ; Suryavanshi, B. M., *App. Ultrasonics*,**2011**, 233-236
- [16] Praharaj, M. K.; Satapathy, A.; Mishra, S. and Mishra, P. R., *J. chem & Pharma Research*, **2012**, 4(4),1990-1920
- [17] Varada Rajulu, A. and Mabu sab,P.,*Mater.sci*,**1995**,18,247-253
- [18] Nikam,P.S. and Mehdi Hasan,*Asian Journal of chemistry*,**1993**,5(2),319-321
- [19] Aswale, S. S. ; Aswale,S.R. ;Dhote,A.B. ,*Int.J.Res.Chem.Enviro*,**2012**,2(4),154-158
- [20] Prasad,N. and Rajendra H. ,*J.Pure Appl.Ultrson*.**2003**,25,25-30
- [21] Suryanarayana,V.C. and Pugazhendhi P.,*Indian Journal of Pure & Applied Physics*,**1986**,24,406-407
- [22] Aswale, S. S. ; Aswale,S.R. ;Dhote,A.B.,*Journal of Natural Sciences*,**2013**,1(1),13-19
- [23] Ekka,A.P. ; Reddy,V.G. and Singh P.R. ,*Acustica* ,**1980**,46,341-342
- [24] Rajulu Varada, A. ; Sreenivasulu G. and Raghuraman S. K. ,*Indian Journal of Chemical Technology*, **1994**, 1, 302 - 304
- [25] Paladhi,R. and Singh,P.R.,*Acoustica*,**2020**,72,90-95