

Design and Implementation of Grid connected Bidirectional Wireless Power Transfer Charging System for Electrical Vehicle application

Rajesh S. Gawale¹, Prof. Y. P. Sushir², Dr. Kiran Dongre³ Dr. Moiz Hussain⁴

¹ME Scholar, Electrical Engineering, Padm. Dr. V. B. Kolte College of Engineering Malkapur

²Department of Electrical Engineering, Padm. Dr. V. B. Kolte College of Engineering, Malkapur

³Associate Professor, Prof. Ram Meghe Ins Institute Of technology and Research Badnera, Amravati

⁴Associate Professor, Padm. Dr. V. B. Kolte College of Engineering, Malkapur

DOI: 10.5281/zenodo.16313451

ABSTRACT

This wireless Power Transfer (WPT) for Electric Vehicle (EV) battery charging application is one of the key upcoming technologies. The Possibility of using EVs to transfer power back to the grid, utilizing the concept of Bidirectional Wireless Power Transfer (BD-WPT) is extensively being explored. The effect of integration of EV on grid is also of concern. This presents analysis of complete grid integrated BD-WPT system for controlling power transfer between grid and EV batter, along with ensuring Unity Power Factor (UPF) at grid side updates. Mathematical model of each component in the system is presented which is then used to design vehicle and grid side controller for achieving desired output. Concepts stated analytically are validated by simulation in MATLAB (Simulink)

Keyword: - Photovoltaic (PV), Transformer less , Inverter

1. INTRODUCTION: The increasing global concern over depletion of fossil fuel reserves and their adverse effects on the environment have resulted in fast development in technologies like renewable energy generation and EVs. Conductive charging has been long introduced but is still not preferred due to tripping hazards, leakage from old cracked cables (particularly in cold zones), risk of electric shock etc. Major drawback of present EVs is the power storage technology, usually battery, which has very unsatisfactory performance. Long charging time of EV batteries is the main reason for its low popularity among consumers. Introduction of wireless power transfer for EV battery charging is thus being considered as a probable solution for aforementioned issues in conductive charging. Wireless charging technique provides several advantages like galvanic isolation, convenient and safe usage in addition to low maintenance due to no physical contacts or moving parts. Also, the battery capacity of EVs with wireless charging could be reduced to 20% or less compared to EVs with conductive charging. Most of the developments in WPT technology have mainly been in applications requiring unidirectional power transfer. In recent years, BD-WPT systems have become popular for implementing the concept of Vehicle to Grid (V2G) for grid integration of EVs. To reduce the effects caused due to intermittent nature of renewable energy systems and facilitate dynamic demand management, V2G concept can be used as cost-effective alternate energy storage unit. In this work, a complete system depicting V2G and G2V concept for controlling desired power transfer between grid and EV battery, along-with ensuring unity power factor at grid side has been analyzed and simulated in MATLAB.

G. Pandey, and Narsa Reddy T [2] This paper presents the analysis of complete grid integrated BD-WPT system for controlling power transfer between grid and EV battery, along-with ensuring Unity Power Factor (UPF) at grid side. As well as mathematical modelling of each component in the system is presented which is used then to design vehicle and grid side controllers for achieving the desired output.

2. LITERATURE SURVEY:

G. Pandey, and Narsa Reddy T [1] This paper presents the analysis of complete grid integrated BD-WPT system for controlling power transfer between grid and EV battery, along-with ensuring Unity Power Factor (UPF) at grid side. As well as mathematical modelling of each component in the system is presented which is used then to design vehicle and grid side controllers for achieving the desired output Y. Tang, Y. Chen, U. K. Madawala, D. J. Thrimawithana and H. Ma [2] In this paper the author has proposed a new controller that uses a measured active power (P) and reactive power (Q) at the resonant network of BD-WPT systems to regulate the power flow in both directions while providing synchronization between two sides without a dedicated communication interface for

controlling of the power transfer of the system as well as they had obtained experimental results for 1 KW prototype system which showed good agreement with the stimulated results.

Cristina-Adina Bilatiu, S.I. Cosman, R.A. Martis [3] This paper deals with identification and evaluation of electric and hybrid propulsion variants for vehicles. The first part of the study identifies and studies the existing variants of propulsion systems for electric and hybrid vehicle whereas the next step involves a comparative study between the systems already analyzed in order to evaluate the performance of different system configurations.

S. Li and C. C. Mi [4] This paper basically focused on reviewing the technologies in the WPT area applicable for EV wireless charging, by introducing WPT in EVs, and the obstacles of charging time, range, and cost can be easily mitigated.

T. Payarou and P. Pillay [5] This paper basically proposes and analyses a novel multipurpose power electronic interface (MPEI) designed for the new generation plug-in electric vehicles (PEVs), and plug-in hybrid electric vehicles (PHEVs). The proposed topology allows vehicle to grid (V2G) and grid to vehicle (G2V) operation to support the grid in times of high load or stress. The operation principles of the MPEI in its different modes are explained and practical results obtained using a real-time controller are discussed and validated in this paper.

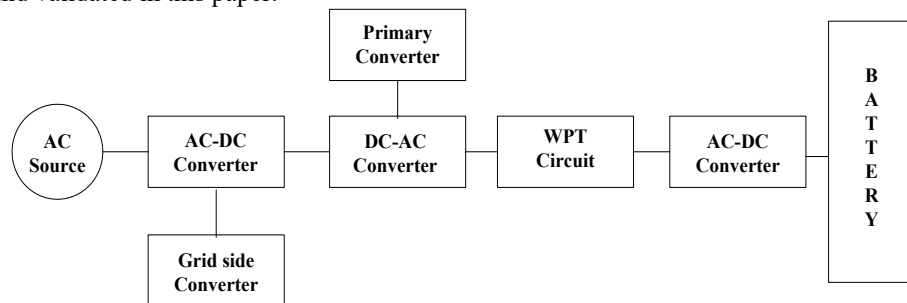


Fig -2: Block Diagram of proposed System

A block diagram broadly describing the elements of a bidirectional wireless power transfer system is shown in Fig. 1. It consists of two sides: primary and secondary. Primary side is connected to the utility grid via a dc link and is usually embedded under the road in places like traffic signals, bus stops, vehicle charging stations etc. The secondary side is connected with EV battery and is placed at the bottom of electric vehicle. As can be seen in Fig. 1. both sides consist of coupling coils, high frequency (HF) converters, compensation circuit and dedicated controllers. When power flows from grid to EV battery (forward direction), primary converter acts as an inverter (DC/AC) and secondary converter acts as a controlled rectifier (AC/DC). Similarly, when EV battery supplies power to the grid (reverse direction), the role of converters is reversed. As already mentioned, there are compensation networks on both primary and secondary sides. This is the concept used by researchers to increase the power transfer efficiency in WPT system. Primary side resonance is used to reduce the Volt-Ampere (VA) rating of the power electronic converter and secondary side resonance to reduce VA rating of the coil [2]. Based on application, suitable converter topology, compensation technique and control technique are chosen. In this work, full bridge Voltage Source Converter (VSC) with LCL compensation topology at both primary and secondary sides will be analyzed. Following are the parameter considering while design the proposed system.

Table-1 System Parameter

Sr. NO	Parameter
1	Grid voltage
2	Filter inductor (Lf)
3	Primary side DC link Capacitor (Cdc)
4	Line Frequency
5	EV battery Voltage
6	Controller Parameter
7	Wireless Coupling coil parameter

3. PROBLEM FORMULATION: A block diagram broadly describing the elements of a bidirectional wireless power transfer system is shown in Fig. 1. It consists of two sides: primary and secondary. Primary side is connected to the utility grid via a dc link and is usually embedded under the road in places like traffic signals, bus stops, vehicle

charging stations etc. The secondary side is connected with EV battery and is placed at the bottom of electric vehicle. As can be seen in Fig. 1, both sides consist of coupling coils, high frequency (HF) converters, compensation circuit and dedicated controllers. When power flows from grid to EV battery (forward direction), primary converter acts as an inverter (DC/AC) and secondary converter acts as a controlled rectifier (AC/DC). Similarly, when EV battery supplies power to the grid (reverse direction), the role of converters is reversed. As already mentioned, there are compensation networks on both primary and secondary sides. This is the concept used by researchers to increase the power transfer efficiency in WPT system. Primary side resonance is used to reduce the Volt-Ampere (VA) rating of the power electronic converter and secondary side resonance to reduce VA rating of the coil [2]. Based on application, suitable converter topology, compensation technique and control technique are chosen. In this work, full bridge Voltage Source Converter (VSC) with LCL compensation topology at both primary and secondary sides will be analyzed. Following are the parameter considering while design the proposed system.

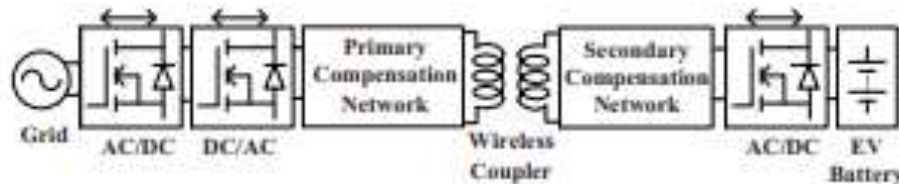


Fig -2 : Block Diagram Grid Connected BD-WPT System

Wireless Power Transfer (WPT) for Electric Vehicle (EV) battery charging application is one of the key upcoming technologies. The possibility of using EVs to transfer power back to the grid, utilizing the concept of Bidirectional Wireless Power Transfer (BD-WPT) is extensively being explored. The effect of integration of EV on grid is also of concern. This paper presents analysis of complete grid integrated BD-WPT system for controlling power transfer between grid and EV battery, along-with ensuring Unity Power Factor (UPF) at grid side. Mathematical model of each component in the system is presented which is then used to design vehicle and grid side controllers for achieving desired output. Concepts stated analytically are validated by simulation in MATLAB (Simulink)

CONCLUSIONS

The work will presents a new high efficiency transformer-less inverter for grid tied PV systems. The key benefits of this research work in brief as: Proposed converter will the overall efficiency. By keeping common mode voltage fixed at center point of bus DC voltage due to this less leakage current will flow through the network than H6 topology. The illustrated work, which minimizes THD at output side, does not require PWM dead time bridge legs.

REFERENCES

1. Gitika Pandey, Narsa Reddy "Power Flow study of Grid Connected Bidirectional WPT systems for EV Application" 20 April 2020 doi:10.1109/PESGRE45664.2020.9070486
2. Y. Tang , Y Chen, U. K. Madawala D. J. Thrma with and H. Ma, "A New Controller for Bidirectional Wireless Power Transfer system in IEEE Transaction Power Electronics vol.33,no. 10,pp.9076-9087,Oct.2018.
3. S.LiandC.C.Mi,"Wireless Power Transfer for Electric Vehicle Applications," in IEEE Journal of Emerging and Selected Topics in PowerElectronics,vol.3,no.1,pp.4-17,March2015.
4. A A S Mohamed, A. Berzoy and O. A. Mohammed, "Experimental Validation of Comprehensive Steady-State Analytical Model of Bidirectional WPT System in EVs Applications," in IEEE Transaction son Vehicular Technology, vol. 66, no. 7, pp. 5584-5594, July2017.
5. D. J. Thrma with and ,U. K. Madawala and YuShi, "Design of a bio-directional inverter for a wireless V2G system,"2010 IEEE International Conference on Su stainable Energy Technologies (IC SET),Kandy,2010,pp.1-5.
6. Y. Hsieh, Z. Lin, M. Chen, H. Hsieh, Y. LiuandH.Chiu," High Efficiency Wireless Power Transfer System for Electric Vehicle Applications," in IEEE Transactions on Circuits and Systems II: Express Briefs ,vol.64,no.8,pp.942-946,Aug.2017.
7. M. L. G. Kiss in, C. Huang, G. A. CovicandJ.T.Boys," Detection of the Tuned Point of a Fixed Frequency LCL Resonant Power Supply,"inIEEETransactionsonPowerElectronics,vol.24,no. 4,pp.1140-1143,April2009.
8. M. K. Uddin, G. Ramasamy, S. Mekhilef, K.Ramand Y. Lau, "Are view on high frequency resonant inverter technologies for wireless power transfer using magnetic resonance coupling,"2014 IEEE Conference on Energy Conversion(CENCON), JohorBahru, 2014,pp.412 417.doi:10.1109/CENCON.2014.6967539