

# Modelling and Comparative Analysis of Bicycle Frame Using CAE Tools with Engineering Materials

Prof. M. S. Sindhikar<sup>1</sup>

<sup>1</sup> Department of Civil Engineering, Pad. Dr. V. B. Kolte College of Engineering, Malkapur

DOI: 10.5281/zenodo.19248950

## ABSTRACT

*A bicycle is a two wheeled vehicle that is moved with pedals, which are attached to the wheels with a gear and chain. It is steered with handlebars. A bicycle, also called a pedal cycle, bike or cycle, is a human-powered or motor-powered assisted, pedal- driven, single- track vehicle, having two wheels attached to a frame, one behind the other. A bicycle rider is called a cyclist, or bicyclist.*

*Bicycles were introduced in the 19th century in Europe. By the early 21st century, more than 1 billion were in existence. These numbers far exceed the number of cars, both in total and ranked by the number of individual models produced. They are the principal means of transportation in many regions. They also provide a popular form of recreation, and have been adapted for use as children's toys, general fitness, military and police applications, courier services, bicycle racing, and bicycle stunts. The basic shape and configuration of a typical upright or "safety bicycle", has changed little since the first chain-driven model was developed around 1885. However, many details have been improved, especially since the advent of modern materials and computer-aided design. These have allowed for a proliferation of specialized designs for many types of cycling.*

**Keywords:-** CAE Tools, Bicycle Frame, Ansys.

## 1. INTRODUCTION

The bicycle's invention has had an enormous effect on society, both in terms of culture and of advancing modern industrial methods. Several components that played a key role in the development of the automobile were initially invented for use in the bicycle, including ball bearings, pneumatic tires, chain-driven sprockets and tensioned wheels.

Although bike and cycle are used interchangeably to refer mostly to two types of two-wheelers, the terms still vary across the world. In India, for example, a cycle refers only to a two-wheeler using pedal power whereas the term bike is used to describe two-wheeler using internal combustion engine or electric motors as a source of motive power instead of motorcycle/motorbike.

In the early 1860s, Frenchmen Pierre Michaux and Pierre Lallemand took bicycle design in a new direction by adding a mechanical crank drive with pedals on an enlarged front wheel (the velocipede). This was the first in mass production. Another French inventor named Douglas Grasso had a failed prototype of Pierre Lallemand's bicycle several years earlier. Several inventions followed using rear-wheel drive, the best known being the rod-driven velocipede by Scotsman Thomas McCall in 1869. In that same year, bicycle wheels with wire spokes were patented by Eugene Meyer of Paris. The French velocipede, made of iron and wood, developed into the "penny-farthing" (historically known as an "ordinary bicycle", a retronym, since there was then no other kind). It featured a tubular steel frame on which were mounted wire-spoked wheels with solid rubber tires. These bicycles were difficult to ride due to their high seat and poor weight distribution.

Bicycles can be categorized in many different ways: by function, by number of riders, by general construction, by gearing or by means of propulsion. The more common types include utility bicycles, mountain bicycles, racing bicycles, touring bicycles, hybrid bicycles, cruiser bicycles, and BMX bikes. Less common are tandems, low riders, tall bikes, fixed gear, folding models, amphibious bicycles, cargo bikes, recumbents and electric bicycles.

A bicycle stays upright while moving forward by being steered so as to keep its center of mass over the wheels. This steering is usually provided by the rider, but under certain conditions may be provided by the bicycle itself. The combined center of mass of a bicycle and its rider must lean into a turn to successfully navigate it. This lean is induced by a method known as counter steering, which can be performed by the rider turning the handlebars directly with the hands or indirectly by leaning the bicycle.

Short-wheelbase or tall bicycles, when braking, can generate enough stopping force at the front wheel to flip longitudinally. The act of purposefully using this force to lift the rear wheel and balance on the front without tipping over is a trick known as a stop pie, endo, or front wheelie.

## 2. LITERATURE REVIEW

Before going with the project, a brief study on papers related to Design and Structural Analysis of A Bicycle Frame Under Static Loading Conditions was done. Many authors portrayed different ideas related to their works on the design of bicycle frames and analysis on different frames. The different papers reviewed are listed below: **Vignesh. M et al 2019** modelled optimum design for an electric bike and analyzed for stress and failure rate for commercial purpose. The main objective was to design and fabricate a light weight still strong, safe, and economical than the conventional ones.

**Derek Civil et al** proposed use of a finite element model to simulate the behavior for a standard steel bicycle frames under a range of measured load cases. These load cases include those measured both in the laboratory setting and also in the field, and include loads transmitted at key areas such as the dropouts and hub, the bottom bracket and drive, the headset and handlebars, and the seat post and saddle.

**W H Tan et al 2021** studied that how the changing of material of the bicycle frame and the insertion of the suspension system can reduce vibration. This study was conducted using Aluminum alloy as the material for bicycle frame to reduce the vibration and the weight of the bike. The suspension system has also been customized into the bicycle frame as the main vibration absorber. The CAD model was developed and been analyzed using static and dynamic analysis based on the specific boundary condition.

**Zhang Long et al 2015** found the best position of human-bike system, simulation experiments. On riding comfort under different riding postures are done with the life mode software employed to facilitate the cycling process as well as to obtain the best position and the size function of it. With BP neural network and GA, analyzing simulation data, conducting regression analysis of parameters on different heights and bike frames, the equation of best position of human-bike system is gained at last.

**Y. Champoux et al 2004** optimized their choice of geometry and tube thickness, bicycle frame manufactures need to use an approach for a modern design on a finite element model. They presented new measurement techniques and an overview of the different approaches. Knowledge about the loads carried by off-road bicycles provides crucial information to bicycle frame manufacturers, allowing them to develop and propose new and optimized versions of their product.

**Arun Abishek et al 2021** analyzed the single main frame electric bike chassis using material AISI 1018 low carbon steel. The Design and Analysis of Single Main Frame Electric Bike Chassis was done successfully by using Ansys workbench software. From the Ansys workbench Total Deformation, Equivalent Shear stress, Maximum Shear Stress, Equivalent Shear Strain, Maximum Shear Strain are obtained. The material AISI-1018 Low carbon steel gives positive results.

**Krishan Kumar Mishra et al 2021** designed bicycle frame which is done in solid works and is analyzed in Ansys software. The frame is imported into Ansys and the analysis is done which includes Stress, Strain and Total deformation of some conditions are analyzed. Conditions of analysis are static, rear wheel braking, steady state pedaling, vertical impact, horizontal impact.

**Nair Ajit et al 2018** replaced bicycle frame material with magnesium alloy (AZ91D) and performed the analysis such as FEM, structural, static analysis, dynamic analysis and report the deformation under different loading conditions, and ensured the implementation of modified mountain bike frame with magnesium AZ91D alloy. The bicycle frame is designed by using CREO PARAMETRIC 3.0 and the analysis of the bicycle frame is done by using ANSYS software tool. A modified mountain bike frame model was created to simulate the behavior of the frame under a range of measured load cases.

## 3. METHODOLOGY

Here's a detailed methodology for designing and analyzing a bicycle frame using Creo and ANSYS: Define design requirements: Determine the specific requirements for the bicycle frame, such as desired material, weight, stiffness, and performance criteria.

Conceptual design: Sketch different frame designs considering factors like frame geometry, tube shapes, and connection points. Evaluate each concept based on the design requirements and select the most promising one to proceed. Detailed design in Creo: Create a detailed 3D model of the selected frame design in Creo or any other CAD software. Ensure accurate dimensions, tube thickness, and appropriate connections between tubes and components.

Export the model: Export the 3D model from Creo in a format compatible with ANSYS, such as STEP or IGES. Import the model into ANSYS: Open ANSYS and import the exported model. Verify that the model imports correctly and that all components are intact. Preprocessing in ANSYS: Clean up the imported geometry, ensuring that there are no gaps or overlapping surfaces. Verify the scale and units of the model to ensure consistency with the analysis requirements. Mesh generation: Generate a suitable mesh to discretize the geometry into smaller elements. Choose an appropriate element type and mesh density for accurate analysis results. Ensure that the mesh is refined in critical areas where high stress or deformation is expected. Material assignment: Assign material properties to different parts of the bicycle frame in ANSYS. - Define the material type, density,

Young's modulus, Poisson's ratio, and any other relevant properties.

Apply loads and constraints: Define the boundary conditions for the analysis to represent real-world scenarios. - Apply loads that mimic the forces experienced during cycling, such as rider weight, pedaling forces, and external forces like bumps. Apply constraints to simulate the bike's connection to the ground or other components.

Analysis setup: Configure the analysis settings in ANSYS, such as selecting the appropriate solver type and defining convergence criteria. Specify other relevant analysis parameters, such as the type of analysis (static, dynamic, or fatigue), time duration (if applicable), and solution control options.

Perform the analysis: Run the analysis in ANSYS to calculate the structural behavior of the bicycle frame under the applied loads and constraints. Monitor the progress and convergence of the analysis, ensuring that it completes successfully.

Postprocessing and result interpretation: Analyze the results obtained from ANSYS, including stress distribution, deformation, and factor of safety. Identify areas of high stress concentrations, deformations, or any other anomalies that may require design refinement. Compare the results against the design requirements to assess the frame's performance. Visualize and interpret the results using ANSYS postprocessing tools. Design refinement: If analysis results reveal any issues or deviations from design requirements, iterate on the design. Make necessary adjustments to the frame geometry, material selection, or other parameters based on the analysis findings. Repeat the analysis and interpretation steps until the design meets all the required criteria.

Throughout the process, it's crucial to refer to relevant industry standards, safety guidelines, and any specific regulations that govern bicycle frame design. Regularly communicate with experts or seek feedback from experienced individuals in the field to ensure the design meets the necessary standards and safety considerations.

## 4. DESIGN AND ANALYSIS

### Design of frame

The body of the bicycle is designed using tools such as sketch tools as of line, circle, spline, arc in different planes. The features tools in the creo were used to get the 3- dimensional or the body such as boss extrude, extrude cut and many other features.

Some of the important tools and commands used in the design of the bicycle are:

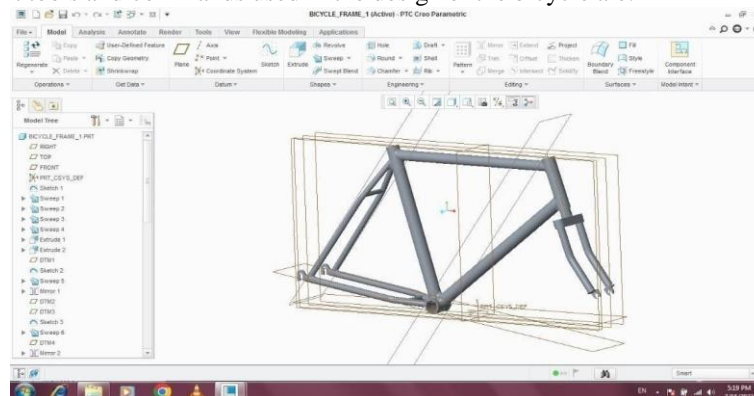


Fig 1. Creo interface

Creo Parametric modelling begins by opening PTC Creo Parametric 7.0 and selecting a working directory from the Home menu to define the destination folder for saving files. A new file is then created by clicking on the "New" option, where "Part" is selected as the type and "Solid" as the subtype, followed by assigning an appropriate name. The default template option is deselected, and "mmns\_part\_solid" is chosen to set up the working environment. Once the modelling interface opens, a suitable datum plane such as Front, Top, or Right is selected as a reference, and the "Sketch" tool is used to begin 2D drafting. The sketch view is oriented parallel to the screen for convenience, and basic sketching tools like line, circle, rectangle, arc, ellipse, and spline are used to create the desired profile. After completing the sketch, it is confirmed, and the "Extrude" command is applied to generate 3D geometry by projecting the 2D sketch normal to the plane.

For components like a bicycle frame, which consist of round section pipes, advanced features such as Sweep or Sweep Blend are used. This involves creating a 2D path sketch on a datum plane and then defining the sweep section. The section is oriented properly using the sketch view option and edited as required before finalizing. Additional reference planes can be created using the "Plane" tool by selecting existing planes, edges, or surfaces and defining the required angles. Symmetrical features can be generated using the "Mirror" command by selecting the geometry and a reference plane. Finally, the model is saved using the "Save As" option, allowing a copy of the work to be stored in the desired location.

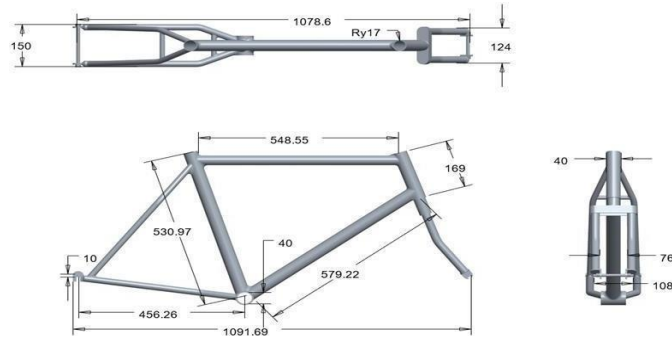


Fig. 2 Dimensions of the frame

### ANALYSIS

An analysis model defines a coherent set of required properties of the system under development. Many of the design criteria are the quality of service constraints from the analysis. There may be others as well, such as reliability and safety level, reusability, maintainability, simplicity, time to market, and so on. Design analysis is the systematic process of developing a design including all information discovery, planning and communications. This can be applied to any type of design including the design of physical things such as buildings and intangible things such as software, information and process.

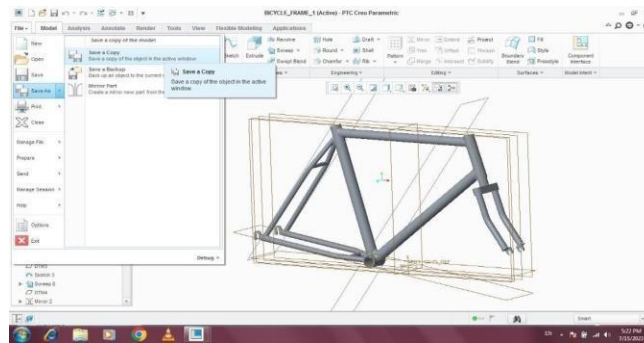


Fig 3 Creo to Ansys


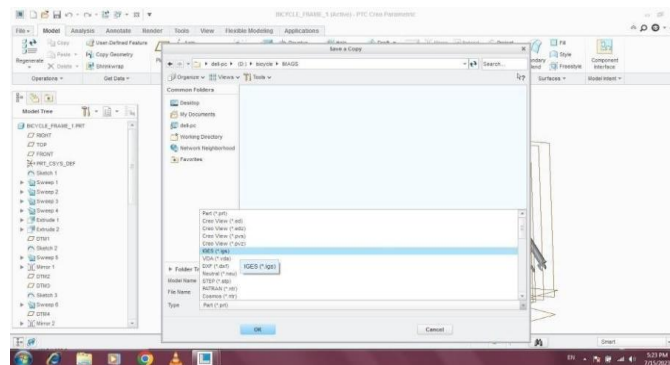


Fig 4 Creo to Ansys

## 5. MODAL ANALYSIS

Table .1

Mode	Frequency [Hz]
1.	49.64
2.	83.757
3.	107.78
4.	271.12
5.	320.79
6.	328.47
7.	363.21
8.	367.61
9.	395.4
10.	428.33

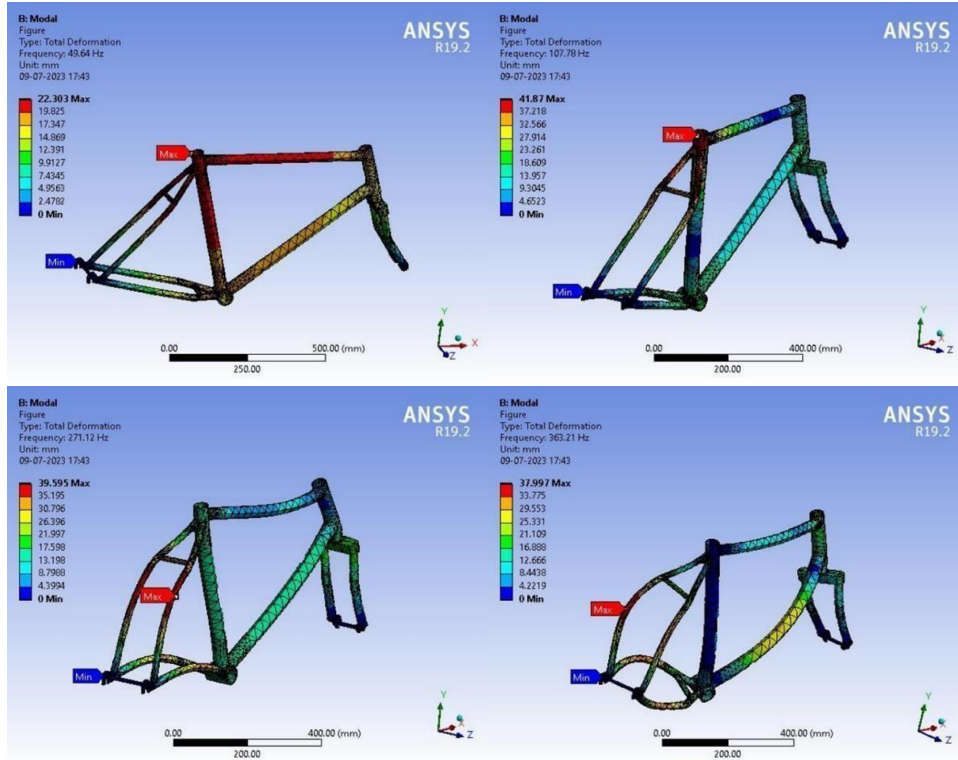

Figs of 5. Total Deformation

Static Structural Results

Table 2

Type	Total Deformation	Directional Deformation	Equivalent (vonMises) Stress	Maximum Principal Stress	Equivalent Elastic Strain	Maximum Principal Elastic Strain	Maximum Shear Stress
<b>Results</b>							
Minimum	0. mm	-0.24411 mm	1.838e-008 MPa	-17.509 MPa	1.6827e-012 mm/mm	-3.0559e-006 mm/mm	9.1934e-009 MPa
Maximum	0.38731 mm	0.23682 mm	173.85 MPa	131.25 MPa	1.5741e-003 mm/mm	1.0481e-003 mm/mm	91.923 MPa
Average	0.25213 mm	1.202e-002 mm	9.0716 MPa	2.9371 MPa	1.4148e-004 mm/mm	7.1495e-005 mm/mm	4.8296 MPa
Minimum Occurs On	Bicycle_Frame_FinalFreeParts Bicycle_Frame_FinalFreeParts[3]		Bicycle_Frame_Final-FreeParts		Bicycle_Frame_FinalFreeParts[3] Bicycle_Frame_FinalFreeParts		
Maximum Occurs On	Bicycle_Frame_Final-FreeParts[3]		Bicycle_Frame_Final-FreeParts		Bicycle_Frame_FinalFreeParts[3] Bicycle_Frame_FinalFreeParts		

Modal solution

Table 3

Object Name	Total Deformation	Total Deformation 2	Total Deformation 3	Total Deformation 4	Total Deformation 5	Total Deformation 6	Total Deformation 7	Total Deformation 8	Total Deformation 9	Total Deformation 10
<b>Results</b>										
Minimum	0. mm									
Maximum	22.303 mm	34.287 mm	41.87 mm	39.595 mm	34.847 mm	44.012 mm	37.997 mm	33.88 mm	57.616 mm	77.486 mm
Average	14.493 mm	13.19 mm	17.15 mm	15.881 mm	11.567 mm	11.581 mm	11.825 mm	7.6962 mm	13.206 mm	12.844 mm
Minimum Occurs On	Bicycle_Frame_Final-FreeParts									
Maximum Occurs On	Bicycle_Frame_Final-FreeParts[3]									
<b>Information</b>										
Frequency	49.64 Hz	83.757 Hz	107.78 Hz	271.12 Hz	320.79 Hz	328.47 Hz	363.21 Hz	367.61 Hz	395.4 Hz	428.33 Hz

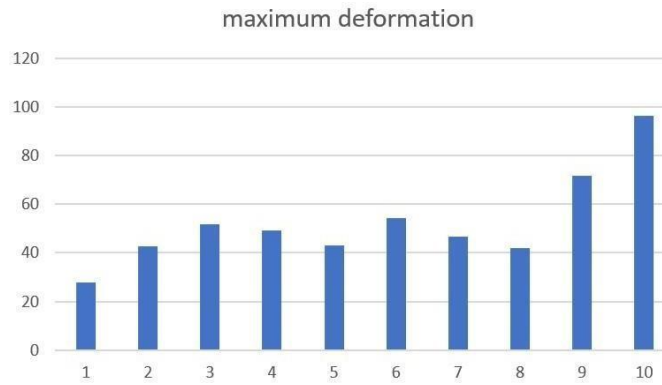


Fig 6 Graphical representation of deformation in material

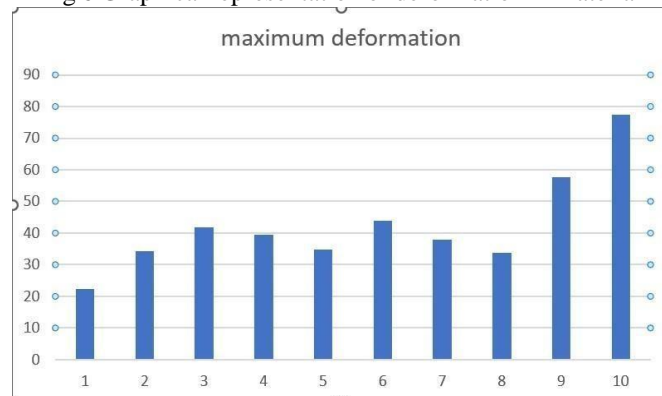


Fig. 7 maximum deformation in magnesium alloy

## 6. CONCLUSION AND FUTURE SCOPE

### CONCLUSION

Aluminum and magnesium are two commonly used materials for bicycle frames, and they exhibit several differences in their structural properties. Here are some key differences between aluminum and magnesium bicycle frame structures:

**Weight:** Magnesium is lighter than aluminum, which makes magnesium frames attractive for riders looking to reduce the overall weight of their bicycles. A lighter frame can contribute to improved acceleration and climbing ability. However, it's important to note that other factors, such as frame design and construction, also impact the overall weight of the bicycle.

**Stiffness:** Aluminum frames are generally stiffer than magnesium frames. Stiffness refers to a material's resistance to bending or flexing. The higher stiffness of aluminum frames can provide better power transfer and responsiveness, resulting in a more efficient ride. Magnesium frames, while lighter, may have slightly more flex or compliance, which can provide a smoother and more comfortable ride.

**Strength:** Aluminum is known for its strength and durability, making it a reliable choice for bicycle frames. It has a high strength-to-weight ratio, meaning it can withstand significant loads while remaining relatively lightweight. Magnesium is strong as aluminum, and therefore, magnesium frames may require additional reinforcement or thicker sections to achieve the desired strength. Proper design and manufacturing techniques are crucial to ensure the structural integrity of magnesium frames.

**Fatigue Resistance:** Aluminum frames generally exhibit good fatigue resistance, meaning they can withstand repeated stress cycles without failure. Magnesium frames, on the other hand, may be more susceptible to fatigue and cracking over time. This issue is due to the lower fatigue strength of magnesium compared to aluminum. However, advancements in magnesium alloy formulations and manufacturing processes can improve the fatigue resistance of magnesium frames.

**Corrosion Resistance:** Aluminum has inherent corrosion resistance, forming a protective oxide layer that helps prevent rust and corrosion. Magnesium, on the other hand, is more prone to corrosion, especially in harsh environments or if not properly protected. Surface treatments and coatings can be applied to magnesium frames to enhance their corrosion resistance.

### SCOPE

The future of bicycle frames is likely to see several advancements and developments as technology and materials continue to evolve. Here are some potential areas of future scope in bicycle frame design and technology:

**Lightweight Materials:** Manufacturers will continue to explore new lightweight materials or combinations of

materials to further reduce the weight of bicycle frames. This could involve advancements in carbon fiber composites, metal alloys, or the integration of nanomaterials to enhance strength-to-weight ratios.

**Advanced Composites:** The use of advanced composites, such as graphene or other high-performance fibers, may become more prevalent in bicycle frame construction. These materials offer exceptional strength, stiffness, and durability, which can lead to even lighter and stronger frames.

**Smart Materials:** Integration of smart materials into bicycle frames could enhance performance and functionality. For example, materials with shape memory alloys could provide adaptive properties, allowing the frame to adjust its shape or absorb vibrations based on road conditions or rider input.

**Additive Manufacturing:** 3D printing or additive manufacturing techniques have the potential to revolutionize bicycle frame production. It allows for complex geometries, customization, and lightweight lattice structures that were previously challenging to achieve. As additive manufacturing technology advances, we may see more optimized and personalized bicycle frames.

**Sustainable Materials:** With increasing focus on sustainability, there is potential for the development of more environmentally friendly materials for bicycle frames. This could involve bio-based polymers, recycled composites, or natural fibers. The goal would be to reduce the environmental impact of frame production and end-of-life disposal.

**Aerodynamics:** As cycling performance gains importance, future bicycle frames may feature improved aerodynamic designs. Frames could be optimized for reduced drag and improved airflow, leading to increased speed and efficiency.

**Integrated Technologies:** Integration of various technologies within the frame itself could become more prevalent. This could include integrated sensors for performance monitoring, power meters, wireless charging capabilities, or even energy-harvesting technologies to power electronic components on the bike.

**Customization and Personalization:** Advances in manufacturing techniques, such as robotic automation or AI-assisted design, could enable greater customization and personalization options for bicycle frames. Riders may be able to specify frame geometries, stiffness characteristics, or even have frames tailored to their body measurements.

## 7. REFERENCES

- [1] Vignesh, Dr. Arumugam K, Vinoth, Hariharan, "DESIGN AND ANALYSIS OF FRAME OF AN ELECTRIC BIKE" (2019), International Journal of Engineering Science Invention (IJESI).
- [2] Derek Covill, Philippe Allard, Jean-Marc Drouet, Nicholas Emerson, "An Assessment of Bicycle Frame Behavior under Various Load Conditions Using Numerical Simulations", (2016) Elsevier, Science Direct.
- [3] W H Tan, M Ashraf and L E Ooi, and J Niresh "Static and Dynamics Analysis of Bicycle Frame", Journal of Physics: Conference Series (2021).
- [4] ZHANG Long, XIANG Zhongxiao "Test Verification and Design of the Bicycle Frame Parameters", Springer Link, Chinese journal of Mechanical Engineering Vol-28(2015).
- [5] Y. Champoux, P. Vitec, P. Maltais "MEASURING THE DYNAMIC STRUCTURAL LOAD OF AN OFF-ROAD BICYCLE FRAME" Springer Link, Experimental Techniques Vol-28(2004).
- [6] Arun Abhishek, Ashraful. L. S, Bala Chandran. S, Bala Kumar. S, Suresh. T. P "DESIGN AND ANALYSIS OF SINGLE MAIN FRAME ELECTRIC BIKE CHASSIS" (2021), International Research Journal of Engineering and Technology(IRJET).
- [7] Krishan Kumar Mishra, Prof. Vedansh Chaturvedi "STRESS ANALYSIS OF BICYCLE FRAME USING ANSYS" (2021), International Research Journal of Engineering and Technology (IRJET).
- [8] Nair Ajit, Irfan Deen S, Jeeva N G, Kavin S, Karthikeyan R, "Design and Analysis of Mountain Bike Frame" (2018), International Journal of Pure and Applied Mathematics.
- [9] Chien-Cheng Lin, Song-Jeng Huang and Chi-Chia Liu, "Structural analysis and optimization of bicycle frame designs" (2017), Sage journals.
- [10] Akhyar, Husaini, Hasanuddin Iskandar and Farhan Ahmad, "Structural Simulations of Bicycle Frame Behavior under Various Load Conditions"(2019),Materials Science Forum- Volume 961.
- [11] M. N. V. Krishna Veni, M. Maheswari Reddy, "CONCEPTUAL DESIGN OF BICYCLE FRAME",
- [12] Galvin P and Morkel A. Modularity on industry structure: the case of the world the effect of product bicycle industry. Ind Innova 2001; 8: 31–47.
- [13] Ninan JA and Siddique Z. Internet-based framework to support integration of the customer in the design of customizable products. Proc IMechE, Part B: J Engineering Manufacture 2007; 221: 529–538. 3.
- [14] Siddique Z and Ninan JA. Modeling of modularity and scaling for integration of customer in design of engineer to-order products. Integer Compute-Aid E 2006; 13: 133–148.
- [15] Shuebrook J, Hampshire RC and van Hoeve W-J. Inventory rebalancing and vehicle routing in bike sharing systems. Eur J Oper Res 2017; 257: 992–1004.
- [16] Ricard MD, Hills-Meyer P, Miller MG, et al. The effects of bicycle frame geometry on muscle activation and power during a Wingate anaerobic test. J Sport Sci Med 2006; 5: 25–32.

- [17] Christians H and Bremner A. Comfort on bicycles and the validity of a commercial bicycle fitting system. *Appl Ergon* 1998; 29: 201–211. 7. Liu XJ, Wang JY, Yu WY, et al. Analysis and optimum design of rider-bicycle mechanisms: design of bicycle parameters for a specified rider. *Sci China Technol Sc* 2011; 54: 3027–3034.
- [18] Wilson DG and Papadopoulos J. *Bicycling science*. 3rd ed. London: The MIT Press, 2004, pp.312–315. 9. Huang SJ and Lin PC. Grain refinement of AM60/ Al<sub>2</sub>O<sub>3</sub>p magnesium metal-matrix composites processed by ECAE. *Kosova Mater* 2013; 51:357–366
- [19] Huang SJ, Lin PC and Aoh JN. Mechanical behavior enhancement of AM60/Al<sub>2</sub>O<sub>3</sub>p magnesium metal– matrix nanocomposites by ECAE. *Mater Manu Process* 2015; 30: 1272–1277.
- [20] Chang RR. Finite element analyses and experimental considerations of the deflection and failure behavior of an asymmetric laminate composite bicycle handlebar. *Proc IMechE, Part E: J Process Mechanical Engineering* 2002; 216: 207–218.
- [21] Escalona JL and Recuero AM. A bicycle model for education in multibody dynamics and real-time interactive simulation. *Multibody Syst Dyn* 2012; 27: 383–
- [22] 402. 13. Klein RE. Using bicycles to teach system dynamics. *IEEE Contra Syst Mag*
- [23] 1989; 9: 4–9. 14. Hsu ZW. Effect of equal channel angular extrusion on the mechanical properties of AZ61 matrix composites with different reinforcement.
- [24] Master's Thesis, National Taiwan University of Science and Technology, Taipei, Taiwan, 2014.
- [25] Barna T, Bretz K, Fodor T, et al. Experimental testing of magnesium and chrome molybdenum-alloy bicycle frames. *IEEE T Veh Technol* 2002; 51: 348–353.
- [26] Cheng YC, Lee CK and Tsai MT. Multi-objective optimization of an on-road bicycle frame by uniform design and compromise programming. *Adv Mech Eng* 2016; 8: 115.