

Review Paper on Dynamic Wireless EV Charging using Embedded Road Coil

Prof. J. R. Hanumant¹, Mirza Ayan Baig², Shubham Baisane³, Sanket Sawale⁴, Sumit Mourya⁵, Sugat Suryvanshi⁶

¹Assistant Professor, Department of Electrical Engineering, Padm. Dr. V. B. Kolte College of Engineering, Malkapur, Maharashtra, India

^{2,3,4,5,6}UG Students, Department of Electrical Engineering, Padm. Dr. V. B. Kolte College of Engineering, Malkapur, Maharashtra, India

DOI: 10.5281/zenodo.19291491

ABSTRACT

The increasing adoption of electric vehicles (EVs) marks a major step toward clean and sustainable transportation. However, the dependency on stationary charging infrastructure and long charging durations limit the practical usability of EVs. This paper presents an innovative approach to Dynamic Wireless Electric Vehicle Charging (DWPT) using Embedded Road Coils, which enables vehicles to charge while in motion through electromagnetic induction. The proposed system utilizes transmitting coils embedded under the road surface and a receiving coil installed beneath the vehicle. The design integrates a high-frequency inverter, resonant tank circuit, and Arduino-based control unit to ensure stable and efficient energy transfer. A prototype was developed to validate the concept, achieving up to 70% power transfer efficiency across a 2–5 cm air gap under dynamic conditions. The project demonstrates the feasibility of continuous and contactless charging for electric vehicles, thereby reducing battery size requirements, eliminating charging downtime, and supporting the future development of smart transportation systems and green mobility infrastructure.

Keywords:- Dynamic Charging, Electric Vehicle, Wireless Power Transfer, Embedded Road Coil, Arduino, Resonant Coupling

1. INTRODUCTION

The transition from conventional fuel-based transportation to electric mobility has gained momentum worldwide due to concerns over environmental pollution and the depletion of fossil fuels. Electric vehicles (EVs) provide a sustainable solution but still face major limitations such as limited driving range, lengthy charging times, and dependency on stationary charging stations. Traditional plug-in charging systems require the vehicle to stop and connect to a power source, reducing operational flexibility and user convenience.

To address these challenges, Dynamic Wireless Power Transfer (DWPT) technology is emerging as a promising solution that enables vehicles to charge while in motion. In this system, transmitting coils embedded beneath the road generate a magnetic field that induces current in the receiver coil mounted beneath the vehicle. This contactless charging method eliminates the need for physical connectors and allows continuous charging, thereby extending driving range and reducing the required battery capacity.

The proposed project, “Dynamic Wireless EV Charging using Embedded Road Coil,” focuses on developing a working prototype that demonstrates efficient power transfer between a stationary road coil and a moving receiver coil using Arduino-based control and high-frequency switching circuits. This work contributes toward developing smart city infrastructure for sustainable and intelligent transportation.

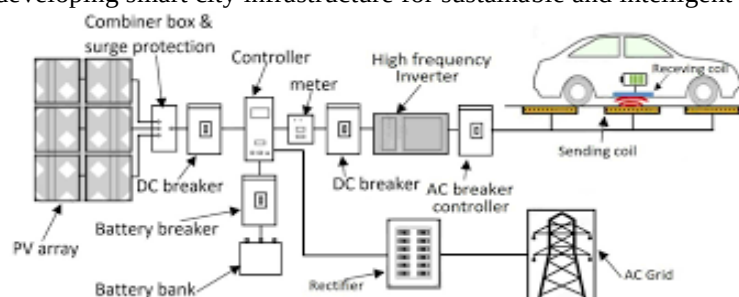


Fig-1: on-road coils transferring power to EVs while moving.

2. METHODOLOGY

2.1 Theoretical Study:

- Investigated principles of electromagnetic induction and resonant coupling for wireless energy transfer.
- Studied the effect of coil geometry, air gap, and frequency on power transfer efficiency.

2.2 Design Stage:

- Designed transmitter and receiver coils using enameled copper wire (AWG 20).
- Implemented an LC resonant circuit for efficient power transfer at 50–100 kHz frequency.
- Developed inverter and rectifier circuits to convert DC to high-frequency AC and back to DC.

2.3 Control System:

- Used Arduino Uno for inverter control and switching operation.
- Integrated sensors (ACS712 current, voltage divider) for monitoring charging parameters.

2.4 Prototype Implementation:

- Constructed road model with embedded transmitting coil powered by a DC supply (12–24 V).
- Installed receiver coil beneath a small EV model equipped with a rechargeable battery and DC motor.

2.5 Testing and Analysis:

- Measured output voltage, current, and efficiency at different distances and alignments.
- Verified system stability under static and dynamic conditions



Fig-2: Dynamic wireless EV charging road embedded coil.

3. MODELING AND ANALYSIS

The wireless charging system is modeled as a coupled resonant circuit consisting of a transmitting coil (primary) and a receiving coil (secondary).

3.1 Power Transmission Principle:

When alternating current flows through the transmitter coil, it generates a varying magnetic field. This field induces an electromotive force (EMF) in the receiver coil based on Faraday's law of electromagnetic induction.

3.2 Mathematical Model:

The mutual inductance (M) between coils determines the efficiency of energy transfer, expressed as:

$$M = k \sqrt{L_1 L_2}$$

where k is the coupling coefficient, and L_1 and L_2 are the self-inductances of the transmitter and receiver coils.

3.3 Resonant Compensation:

Both sides are tuned using capacitors to resonate at the same frequency, minimizing reactive losses and maximizing power transfer.

3.4 System Components:

- i. Input Voltage: 12–24 V DC
- ii. Operating Frequency: 50–100 kHz
- iii. Output Voltage: 5–12 V DC
- iv. Transmission Distance: 2–5 cm

v.Efficiency: 60–80% (targeted)

Simulation and circuit modeling were performed using MATLAB/Simulink to verify coil alignment, power factor, and current flow characteristics.

3. CONCLUSIONS

The project “Dynamic Wireless EV Charging using Embedded Road Coil” successfully demonstrates a cost-effective and efficient method of wirelessly charging electric vehicles while in motion. The developed prototype highlights that using resonant inductive coupling, it is possible to transfer energy across small air gaps without physical contact.

This technology minimizes the need for stationary charging, reduces battery capacity requirements, and supports the development of smart transportation systems. Future work includes scaling the system for high-power applications, implementing renewable energy integration, and developing automated vehicle detection and alignment systems for real-world highways.

4. ACKNOWLEDGEMENT

The authors would like to express their sincere gratitude to Prof. J. R. Hanumant for his valuable guidance, continuous encouragement, and insightful suggestions throughout the course of this review work. His expertise and support played a crucial role in the successful completion of this paper.

We also extend our heartfelt thanks to the Department of Electrical Engineering and the faculty members of our institution for providing the necessary resources, technical support, and academic environment to carry out this study effectively.

Finally, we are grateful to our friends and family members for their constant motivation and support during the completion of this project.

5. REFERENCES

- [1] S. Pawar, V. Kulkarni, P. Ghule, K. Dhumal, and M. Borole, “*Dynamic Wireless EV Charging System*,” *International Journal for Research in Applied Science & Engineering Technology (IJRASET)*, 2025. This paper presents a road-embedded dynamic wireless charging system including coil design and resonant WPT methodology with prototype evaluation — useful for your core topic.
- [2] K. Popli, K. Agrawal, and P. Raj, “*Review Paper on Wireless Energy Transfer in Electric Vehicles*,” *IJRASET*, 2023. This review explores dynamic wireless on-road charging systems for EVs and discusses WPT technology developments relevant to your review.
- [3] G. Vaishnavi, V. B. Patel, N. N. Patel, and M. Bhavsar, “*Comprehensive Analysis and Design of Dynamic Wireless Power Transfer Technologies used for Electric Vehicle Charging Stations*,” *IRJAEH*, 2025. This work analyzes various WPT topologies and design guidelines, including inductive and resonant systems central to embedded road coils.
- [4] “*An Overview of Dynamic Inductive Charging for Electric Vehicles*,” *Energies*, MDPI. This extensive review article summarizes state-of-the-art transmitter/coil design, compensation networks, power converters, and key challenges for dynamic EV inductive charging systems.